

# Telephone Drop Cable No. 1, 2, 6 & 8



NORDEN Telephone Drop Cable No. 1, 2, 6 & 8 are designed to use for outdoor connections between telephone distribution points and subscriber premises. The cable consist two parallel conductors with PVC insulation and 8-shape in figure.



## CABLE STANDARD

CW 1166	DROP CABLE NO 1 (0.91MM)
CW 208	DROP CABLE NO 2 (0.71MM)
CW 1247	DROP CABLE NO 6 (0.81MM)
CW 1320A	DROP CABLE NO 8 (1.14MM)

## CABLE CONSTRUCTION

Conductor:	Solid copper covered steel of 0.91mm to BS 4807 (Drop Wires No. 1) Solid copper covered steel of 0.71mm to BS 4807 (Drop Wires No. 2) Solid copper covered steel of 0.81mm to BS 4807 (Drop Wires No. 6) Solid copper covered steel of 1.14mm to BS 4807 (Drop Wires No. 8)
Insulation:	PVC to BS 6746 T1 (Drop Wires No. 1) PVC to BS 6746 T2 (Drop Wires No. 2) PVC to BS 7878 T1 (Drop Wires No. 6) PVC to BS 6746 T1 (Drop Wires No. 8)
Outer Colour:	Black, 8-shape figure

## PHYSICAL CHARACTERISTICS


CHARACTERISTIC	VALUE			
	0.91 mm Conductor	0.71 mm Conductor	0.81 mm Conductor	1.14 mm Conductor
BT Drop Wire No	1	2	6	8
Conductor Size	0.65 mm <sup>2</sup>	0.4 mm <sup>2</sup>	0.52 mm <sup>2</sup>	1.02 mm <sup>2</sup>
Nom. Insulation Thickness	0.75 mm	1.02 mm	0.8 mm	1.52 mm
Min. Bending Radius	10 x D			
Operating Temperature	-20°C to +75°C			
Installation Temperature	-20°C to +50°C			

## ELECTRICAL CHARACTERISTICS

CHARACTERISTIC	UNIT	VALUE
Min. Insulation Resistant at 500V DC	MΩ.km	50



# Telephone Drop Cable No. 1, 2, 6 & 8

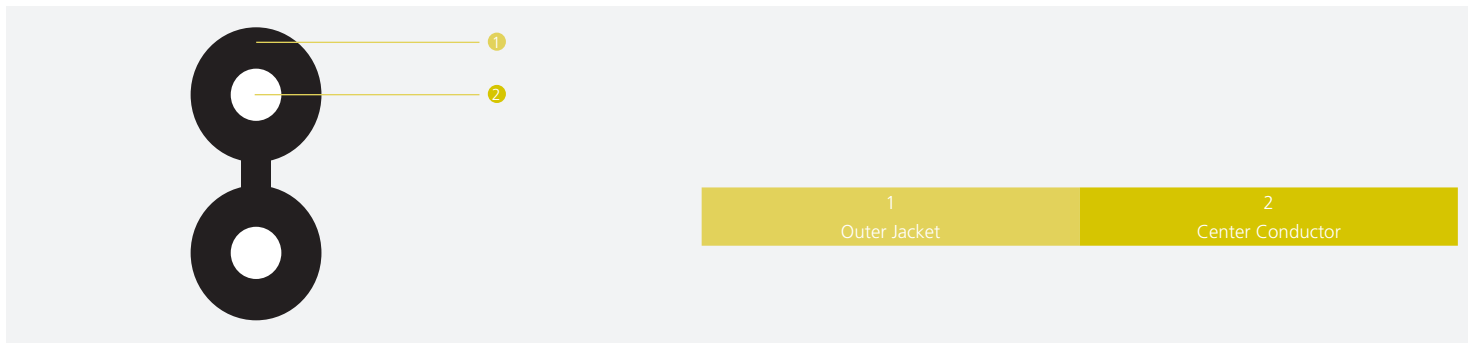

## ORDERING INFORMATION

Part Number	Description	No. of Core	Cable Dimension (mm)
212-11101002	0.91 mm Telephone Drop Cable No. 1	2	2.7 x 5.6
212-14071002	0.71 mm Telephone Drop Cable No. 2	2	2.7 x 6.0
212-12081002	0.81 mm Telephone Drop Cable No. 6	2	2.5 x 5.4
212-15111002	1.14 mm Telephone Drop Cable No. 8	2	4.4 x 9.4

## PACKING INFORMATION

Cable Length (Metre)	Packing Mode	N.W (kg)	G.W (kg)	Dimension (cm)
500	Ply Reel	21.6	23.0	56.0 x 28.5 x 31.0
1000	Ply Reel	27.0	28.5	26.0 x 28.5 x 35.0