


CENTRAL LOOSE TUBE DOUBLE STEEL TAPE ARMoured CABLE

These cables are constructed with multiple tubes filled with water blocking jelly with a fibre count up to 144 fibre strands. They form the backbone of high speed networks and give flexibility to networks. They give flexibility versatility to networks and can be used for direct burial applications.

Metallic/Non metallic FRP strength members in the cable give it good tensile strength, water blocking jelly in the tube and tape over the tube give it excellent water and moisture resistance. An aluminium tape and PE outer sheath give this cable excellent mechanical, ultraviolet and environmental protection.

They come in larger delivery length, so can also be used in long distance communication system, building interconnections, trunk lines, LAN and distribution networks.

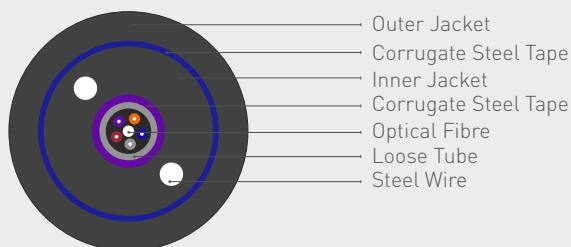

COMPLIANCE

ITU-T G652.B OS1
 ITU-T G652.D/G655/G657.A1/G657.A2 OS2
 ITU-T G651.1 OM1 OM2 OM3 OM4
 IEC60793-2-10 type A1a.1/A1b OM1/OM2
 IEC60793-2-10 type A1a.2 OM3
 IEC60793-2-10 type A1a.3 OM4
 ISO/IEC 11801 , ISO/IEC 24702
 IEEE 802.3z Gigabit Ethernet
 ANSI/TIA/EIA 568C.3
 RoHS Compliant Directive 2002/95/EC

MECHANICAL & ENVIRONMENTAL CHARACTERISTICS

Characteristics	Short Term	Long Term
Max. Tensile Load	3000 N	1000 N
Max. Crush Load	1500 N/100 mm	500 N/100 mm
UL Fire Rated	OFNR	
Operating Temp.	-20 °C to +60 °C	
Storage Temp.	-40 °C to +85 °C	
Sheath Material	Standard: PVC Optional: LSZH, PE or Other	

ORDERING INFORMATION

Part Number	Fibre Count	Outer Diameter (mm)	Loose Tube Diameter (mm)	Cable Weight (kg/km)	Bend Radius	
					Short (mm)	Long (mm)
3113-31002FXXCL	2	12.0	2.8	165.0	20D	10D
3113-31004FXXCL	4	12.0	2.8	165.0	20D	10D
3113-31006FXXCL	6	12.0	2.8	165.0	20D	10D
3113-31008FXXCL	8	12.0	2.8	165.0	20D	10D
3113-31012FXXCL	12	12.0	2.8	165.0	20D	10D

CENTRAL LOOSE TUBE DOUBLE STEEL TAPE ARMoured CABLE

ORDERING GUIDE

Cable Type	Jacket	Fibre/ Tube	Fibre Count	Fibre Type (FXX)	Jacket Colour (CL)
3113	1=PVC 2=LSZH 3=PE	1=12 F/T 2=08 F/T 3=06 F/T 4=04 F/T	No. of Fibre	OM1=62.5/125 OM1 OM2=50/125 OM2 OM3=50/125 OM3 OM4=50/125 OM4 OS1=9/125 [G652.B] OS1 OS2=9/125 [G652.D] OS2 500=9/125 [G655] OS2 7A1=9/125 [G657.A1] OS2 7A2=9/125 [G657.A2] OS2	As noted

CL: BK(Black), OR(Orange), YL(Yellow), GN(Green), AQ(Aqua), RD(Red), BL(Blue)

PACKING INFORMATION

Part Number	Packing Length	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
3113-31002FXXCL	2500 x 1	Wooden Drum	412.0	437.0	800 x 800 x 570
3113-31004FXXCL	2500 x 1	Wooden Drum	412.0	437.0	800 x 800 x 570
3113-31006FXXCL	2500 x 1	Wooden Drum	412.0	437.0	800 x 800 x 570
3113-31008FXXCL	2500 x 1	Wooden Drum	412.0	437.0	800 x 800 x 570
3113-31012FXXCL	2500 x 1	Wooden Drum	412.0	437.0	800 x 800 x 570