


CATEGORY 6 F/UTP PATCH CORD

Norden Category 6 F/UTP patch cords are manufactured using high quality F/UTP four pair Category 6 stranded cable, and feature cable strain relief boots with a plug latch protection cap. This patch cord when used with high performance Norden Category 6 connectivity (solid F/UTP cable, patch panels and work area outlets), provide superior performance capabilities of high bandwidth (Gigabit 1000Base-T and 1000Base-Tx) applications support.

This is fully backward compatible to Category 5e (Class D) products. Each patch cord is tested with Fluke tester and individual cover include with the report. Norden Category 6 Patch cord is tested for transmission frequencies of up to 250 MHz.

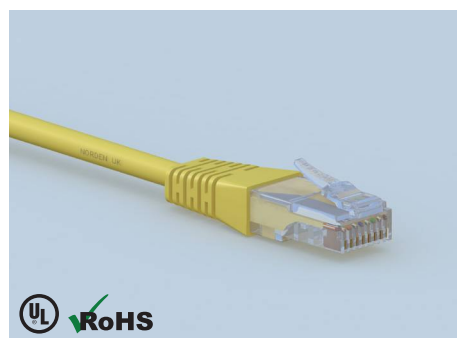

COMPLIANCE

IEEE 802.af and IEEE 802.3at for PoE applications
ANSI/TIA-568-C.2 and ISO/IEC-11801 (2nd Edition)
IEC 61156-2, EN 50173; EN 50288-6-2 Category 6 standard

DESIGN & MATERIALS

Basic Cable Conductor	Stranded Bare Annealed Copper
Wire Insulation	SFS PE
Number Of Insulated Conductors	8
Colour Code Of Pairs	Blue x White, Orange x White, Green x White, Brown x White
Individual Pair Shield	Aluminium foil
Overall Shield	Nil
Drain Wire	Yes
Outer Jacket and Boots	LSZH Low Smoke Zero Halogen or PVC
Jacket And Boot Colour	Per requirement
Standard Surface Marking	Includes Norden P/N, cable description
Cable O.Diameter	5.7 ± 0.2 mm
Bend Radius	> 25 mm without load
Storage Temperature	-20 °C to +80 °C
Temperature Operating Range	-20 °C to +75 °C
Flame Test	IEC 60332-1
Halogen Content In LSZH Cables	Null
Wire Scheme	T568B

ELECTRICAL DATA

Impedance @ 1-100 MHz	100 ±15 Ω
Impedance @ 100-250 MHz	100 ±15 Ω
Conductor Resistance	< 73 Ω/km
Contact Resistance	20 MΩ max.
Resistance Unbalance	2 % max.
Voltage Rating	72 Vdc
Dielectric Strength	1 KV/min.rms
Ampacity	1.0 Amps max.
Insulation Resistance	150 MΩ/Km
Transfer Impedance	N/A
Pair To Ground Capacitance Unbalance	3.3 nF/Km nom.

CATEGORY 6 F/UTP PATCH CORD

MECHANICAL & TRANSMISSION DATA

Cable To Plug Tensile Strength	96 N min.
Pulling Force	10 N max.
Durability	1000 Mating Cycles
Propagation Delay 1-250 MHz	< 25 ns/100m

ELECTRICAL PERFORMANCE DATA

Freq. (MHz)	NEXT(dB) min.			RL(dB) min.
	2m cord	5m cord	10m cord	
1	68.0	68.0	68.0	20.0
4	65.0	65.0	65.0	21.8
10	64.8	64.2	62.8	22.5
20	60.9	58.6	57.2	23.4
30	56.2	54.9	53.6	23.0
60	50.4	49.2	48.1	20.0
100	46.4	45.3	44.4	18.0
125	44.5	43.5	42.7	17.0
150	43.2	42.2	41.1	16.2
200	40.8	39.6	39.1	15.0
250	38.8	37.9	37.6	13.8

ORDERING INFORMATION

Part Number	Description	Length
127-31201X	Category 6 F/UTP Patch Cord PVC 01m	1m
127-31202X	Category 6 F/UTP Patch Cord PVC 02m	2m
127-31203X	Category 6 F/UTP Patch Cord PVC 03m	3m
127-31205X	Category 6 F/UTP Patch Cord PVC 05m	5m
127-31210X	Category 6 F/UTP Patch Cord PVC 10m	10m
127-31215X	Category 6 F/UTP Patch Cord PVC 15m	15m
127-31220X	Category 6 F/UTP Patch Cord PVC 20m	20m
127-31225X	Category 6 F/UTP Patch Cord PVC 25m	25m
127-32201X	Category 6 F/UTP Patch Cord LSZH 01m	1m
127-32202X	Category 6 F/UTP Patch Cord LSZH 02m	2m
127-32203X	Category 6 F/UTP Patch Cord LSZH 03m	3m
127-32205X	Category 6 F/UTP Patch Cord LSZH 05m	5m
127-32210X	Category 6 F/UTP Patch Cord LSZH 10m	10m
127-32215X	Category 6 F/UTP Patch Cord LSZH 15m	15m
127-32220X	Category 6 F/UTP Patch Cord LSZH 20m	20m
127-32225X	Category 6 F/UTP Patch Cord LSZH 25m	25m

X: BK(Black), BL(Blue), GN(Green), GY(Gray), RD(Red), WH(White), YL(Yellow)

CATEGORY 6 F/UTP PATCH CORD

PACKING INFORMATION

Part Number	Packing Qty.	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
127-31201X	150 x 1	Carton Box	8.6	9.7	520 x 420 x 290
127-31202X	120 x 1	Carton Box	11.6	12.7	520 x 420 x 290
127-31203X	100 x 1	Carton Box	13.5	14.6	520 x 420 x 290
127-31205X	60 x 1	Carton Box	13.5	14.6	520 x 420 x 290
127-31210X	35 x 1	Carton Box	15.7	16.8	520 x 420 x 290
127-31215X	25 x 1	Carton Box	15.7	16.8	520 x 420 x 290
127-31220X	20 x 1	Carton Box	17.1	18.2	520 x 420 x 290
127-31225X	20 x 1	Carton Box	21.0	22.1	520 x 420 x 290
127-32201X	150 x 1	Carton Box	8.6	9.7	520 x 420 x 290
127-32202X	120 x 1	Carton Box	11.6	12.7	520 x 420 x 290
127-32203X	100 x 1	Carton Box	13.5	14.6	520 x 420 x 290
127-32205X	60 x 1	Carton Box	13.5	14.6	520 x 420 x 290
127-32210X	35 x 1	Carton Box	15.7	16.8	520 x 420 x 290
127-32215X	25 x 1	Carton Box	15.7	16.8	520 x 420 x 290
127-32220X	20 x 1	Carton Box	17.1	18.2	520 x 420 x 290
127-32225X	20 x 1	Carton Box	21.0	22.1	520 x 420 x 290