


BREAKOUT CABLE ASSEMBLY

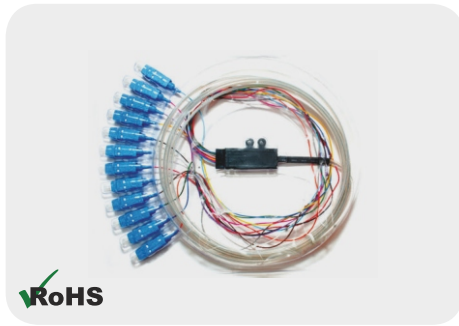

Singlemode or Multimode cable
 From 6 cables to 48 cables
 With SC, ST, FC, LC, MTRJ or E2000 connector
 Low insertion loss
 High return loss

ORDERING INFORMATION

Description	Part Number	
Singlemode	OS1 (9/125)	OS2 (9/125)
SC/PC 12core 1.6mm PVC 3m	323-12120S1S130	323-12120S2S130
ST/PC 12core 1.6mm PVC 3m	323-12120S1T130	323-12120S2T130
FC/PC 12core 1.6mm PVC 3m	323-12120S1F130	323-12120S2F130
LC/PC 12core 1.6mm PVC 3m	323-12120S1L130	323-12120S2L130
MTRJ/PC 12core 1.6mm PVC 3m	323-12120S1M130	323-12120S2M130
E2000/PC 12core 1.6mm PVC 3m	323-12120S1E130	323-12120S2E130

Description	Part Number			
Multimode	OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)
SC/PC 12core 1.6mm PVC 3m	323-12120M1S130	323-12120M2S130	323-12120M3S130	323-12120M4S130
ST/PC 12core 1.6mm PVC 3m	323-12120M1T130	323-12120M2T130	323-12120M3T130	323-12120M4T130
FC/PC 12core 1.6mm PVC 3m	323-12120M1F130	323-12120M2F130	323-12120M3F130	323-12120M4F130
LC/PC 12core 1.6mm PVC 3m	323-12120M1L130	323-12120M2L130	323-12120M3L130	323-12120M4L130
MTRJ/PC 12core 1.6mm PVC 3m	323-12120M1M130	323-12120M2M130	323-12120M3M130	323-12120M4M130
E2000/PC 12core 1.6mm PVC 3m	323-12120M1E130	323-12120M2E130	323-12120M3E130	323-12120M4E130

ORDERING GUIDE

Breakout Cable	No of Cable	Jacket	Thickness	Fibre Type	Connector	Polish	Length
423	06: 6 core 12: 12 core 24: 24 core 36: 36 core 48: 48 core	1:PVC 2:LSZH	1: 0.9 mm 2: 1.6 mm 3: 2.0 mm 4: 3.0 mm	OM1=62.5/125 OM1 OM2=50/125 OM2 OM3=50/125 OM3 OM4=50/125 OM4 OS1=9/125 [G652.B] OS1 OS2=9/125 [G652.D] OS2 500=9/125 [G655] OS2 7A1=9/125 [G657.A1] OS2 7A2=9/125 [G657.A2] OS2	S: SC T: ST F: FC L: LC M: MTRJ E: E2000	1:PC 3:APC	10:1m 15:1.5m 20:2m 25:2.5m 30:3m

PACKING INFORMATION

Product Type	Packing Length	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
12 core 1.6 mm 3m	200 x 2 x 1	Carton Box	19.5	20.5	420 x 420 x 380